







## HIGHER EXPECTATIONS FROM START TO FINISH

#### THE HEART OF ALL WE DO

At Agrowplow our design methodology is based on a single guiding principle: prosperity through soil care. We believe that by looking after the ground under our feet, we help ensure the success and productivity of our customers long into the future.

We offer a range of seeding systems based on that principle, from the small and versatile AD083 to the large-scale performance of the AD730. Each of these machines can be customised to suit your farm, and they all have in common Agrowplow's high-strength frame, exceptional trash-handling capabilities, and commitment to promoting crop emergence through soil care.

You can be confident that your new seed drill from Agrowplow has the features to support your operations, the technology to maximise the potential of your crop, and the strength to last year after year.

#### STRENGTH TO LAST

Agrowplow has been designing and building farm machinery in Australia for over 40 years, and we want the machines we make to last even longer. All Agrowdrills are built from a fully welded RHS steel frame to keep them running in tough conditions. This, combined with the high strength coil tynes and Baker Boot points, means Agrowplow seed drills are capable of penetrating even the hardest soils to maximise efficiency and crop emergence.

Each of our seed drills is based on years of iterative design, building on the successes of the past while innovating to ensure success in the future. We know our customers are always the best source of feedback, which is why we offer every one of our customers the opportunity to tell us exactly what they love about our machines.

The high strength frame and tynes, together with Agrowplow's ongoing customer support and parts availability, means you can be confident that the seed drill you buy today will still run years into the future.

### **POWERFUL VERSATILITY**

We design our products to support a range of activities. This includes planting summer and winter crops, legumes, oilseeds, and pasture renovation. They also enable both traditional tillage or zero-tillage operations to maximise crop emergence and maintain healthy soil structures.

With an Agrowdrill behind you, you can be confident you've got a machine that will offer exceptional seed placement and trash-handling in a range of sowing conditions.

The gated double-outlet fluted roller distribution system is exclusive to Agrowplow. It delivers higher sowing rates, reduced bridging, and handles a wide range of seed and granular fertiliser. Together with the variable gearbox and the optional small seeds box, you can sow a vast variety of seed with pinpoint accuracy at almost any rate.





## FOR SMALL FARMS AND SERIOUS BUSINESS

At Agrowplow we don't compromise. Even though the AD083 is the smallest of our seed drills, our goal remains the same: to design and build robust, dependable seed drills that handle Australia's tough conditions no matter what the job.

The AD083 features all the innovations you've come to expect from Agrowplow in a compact, easily-maneuvered machine. It is available with either a high strength coil tyne or double-disc unit. Our 425 coil tyne has a high 136kg breakout to maximise soil penetration, and the double-disc unit enables minimum tillage operations to promote healthy soil.

## **ROBUST AND VERSATILE**

The AD083 is built from a fully-welded 100x100x6mm RHS steel frame. This frame is designed to have the strength and weight to survive even the harshest conditions. Complementing this is the weather-proofed, powder-coated lid and box for a long-lasting and high-quality finish.

The AD083 also features our unique gated double-outlet fluted roller distribution system to provide high sowing rates, reduce bridging, and handle a wide variety of seed and granular fertiliser.

Maintenance and troubleshooting are also made quick and easy with the AD083's simple mechanical operation. Core functions are easily accessed and replacing parts doesn't require lengthy downtime.

#### PERFECT FOR VITICULTURE

The AD083 Agrowdrill's is perfectly suited to viticulture. It features a transport width of just two metres which makes it able to easily navigate narrow vineyard rows. The 401 double discs make handling the trash that accumulates around trellises simple.

| AT A GLANCE           |                                       |
|-----------------------|---------------------------------------|
| Sowing Rows           | 10, 11, 17, or 18                     |
| Tyne Options          | 425 Coil Tyne<br>401 Double Disc Unit |
| Working Width         | 1.75 - 2.7m                           |
| Toolbars              | 3                                     |
| Toolbar Spacings      | 450mm                                 |
| Frame                 | 100x100x6mm RHS steel                 |
| Under Frame Clearance | 620mm                                 |
| Hopper Capacity       | 245 - 407L                            |
| Drawbar Power         | 60-100hp                              |





# A COMPACT MACHINE WITH BIG VALUE

With the AD130 we aim to maximise your potential yield with a machine that offers robust features and simple design. Like the AD083, the AD130 Agrowdrill is made of highly durable 100x100x6mm RHS steel to give it the strength needed to penetrate dry soils and survive a range of conditions.

## PROMOTE GROWTH AND MINIMISE TRASH BLOCKAGES

The AD130 features the tried and tested 425 coil tyne with Baker Boot. This tyne offers a high strength breakout with a point designed to maximise seed potential and germination.

High clearance and wide spacings help keep trash to a minimum, and the 401 double-disc unit can also be fitted to help manage high trash conditions or for minimum tillage operations.

## SEED AND FERTILISE IN A SINGLE PASS

The AD130 features high strength dual hoppers. This allows for the segregation of seed and fertiliser, allowing seed and fertiliser to be applied in a single pass while preventing cross-contamination.

It also features robust and straightforward operations that make maintenance and troubleshooting quick and easy.

The AD130 is available with both a CAT2 three-point linkage or with a trailing hydraulic lift option, giving you additional flexibility for transport.

| AT A GLANCE           |                                       |
|-----------------------|---------------------------------------|
| Sowing Rows           | 16 or 20                              |
| Tyne Options          | 425 Coil Tyne<br>401 Double Disc Unit |
| Working Width         | 2.4 - 3m                              |
| Toolbars              | 3                                     |
| Toolbar Spacings      | 440mm                                 |
| Frame                 | 100x100x6mm RHS steel                 |
| Under Frame Clearance | 620mm                                 |
| Hopper Capacity       | 300 - 385L                            |
| Drawbar Power         | 70 - 100hp                            |





# PRECISION SEEDING COMES NATURALLY

If you're looking for a machine that can offer all the innovation and reliability of the Agrowdrill range, with the added versatility to help get the job done faster, then look no further than the AD230 Agrowdrill.

## **SOW WIDER FOR LONGER**

The AD230 follows the same design principals as the AD130, but with additional capabilities. The enhanced design places the wheels inside the working width which allows for sowing across the entire width of the machine. It also has a measurably larger hopper. This additional functionality allows you to sow more efficiently for longer, minimising downtime.

## **SOW SMARTER, NOT HARDER**

We know that when you're in the field, every time something goes wrong it's time wasted. That's why we've added a range of additional features to the AD230 to make life easier when you're working. The additional sowing width provides better trash handling, minimising blockages and interruptions. The direct-drive mechanical clutch enables easier adjustment of the sowing rate. It also allows the robust dog clutch to engage the drill when lowered and disengage it when lifted, making turning while sowing easier.

## MORE CONVENIENT TO USE

The AD230 features an adjustable platform. This allows you to easily set the height to whatever is more comfortable for you to fill and clean the hoppers. Your back will thank you.

Even checking the status of the drill is made easier with the addition of shaft rotator indicators. Simply glance at the machine for easy visual confirmation that it is in operation and functioning correctly.

| AT A GLANCE           |                       |  |  |  |  |  |  |  |
|-----------------------|-----------------------|--|--|--|--|--|--|--|
| Sowing Rows           | 16, 20, 24, or 28     |  |  |  |  |  |  |  |
| Tyne Options          | 425 Coil Tyne         |  |  |  |  |  |  |  |
| Working Width         | 3 - 3.6m              |  |  |  |  |  |  |  |
| Toolbars              | 4                     |  |  |  |  |  |  |  |
| Toolbar Spacings      | 442mm                 |  |  |  |  |  |  |  |
| Frame                 | 100x100x6mm RHS steel |  |  |  |  |  |  |  |
| Under Frame Clearance | 620mm                 |  |  |  |  |  |  |  |
| Hopper Capacity       | 1,210 - 1,420L        |  |  |  |  |  |  |  |
| Drawbar Power         | 80 - 130hp            |  |  |  |  |  |  |  |





## PRECISION PERFORMANCE FOR THE LARGEST JOBS

When you're a farmer, time is never on your side. Every minute lost to inefficient calibration, refilling seed hoppers, or replacing corroded parts has a cost: in sunlight, growth time, or money. So when you have paddock after paddock stretching away in front of you, you want to know your equipment is up to the task.

The AD730 represents the peak in the Agrowdrill range, offering all of our innovative features in a machine with the durability and reliability to last row after row, season after season.

## PREMIUM ACCURACY IN HARD & DRY CONDITIONS

The AD730 has a range of features to ensure optimal performance across a variety of conditions. The drill is built around a heavy-duty spring tyne that has a huge 250kg breakout. This, along with the fully-welded 100x100x9mm RHS steel frame gives the AD730 the ability to penetrate soils even in the hardest and driest conditions. The sturdy

construction of the frame gives the AD730 additional durability, meaning it will keep sowing season after season.

### WORK NEVER STOPS

The AD730 has been designed to sow vast paddocks without stopping. The massive hopper is available in capacities up to 2160L to allow sowing to continue long after smaller machines would have to stop and reload. The high breakout on the heavy-duty tyne means less stopping to reset after breaks so you can get on with the job with fewer interruptions. With the addition of a small seeds box, trailing Flexiroller, or presswheels you can easily sow seed, fertiliser, and pasture in a single pass, maximising efficiency and minimising soil compaction, promoting soil health and better growth.

The AD730 Agrowdrill is also available with a 401 double disc to enable even higher accuracy and minimum tillage operations.

| AT A GLANCE           |   |  |  |  |  |  |  |  |  |
|-----------------------|---|--|--|--|--|--|--|--|--|
| Sowing Rows           | 18, 20, 22, 24, or 28   |  |  |  |  |  |  |  |  |
| Tyne Options          | 552 HD Spring Tyne<br>251 Spring Tyne<br>401 Double Disc Unit |  |  |  |  |  |  |  |  |
| Working Width         | 4.05 - 4.9m   |  |  |  |  |  |  |  |  |
| Toolbars              | 4   |  |  |  |  |  |  |  |  |
| Toolbar Spacings      | 550mm   |  |  |  |  |  |  |  |  |
| Frame                 | 100x100x6mm RHS steel   |  |  |  |  |  |  |  |  |
| Under Frame Clearance | Up to 720mm   |  |  |  |  |  |  |  |  |
| Hopper Capacity       | 1,760 - 2,160L  |  |  |  |  |  |  |  |  |
| Drawbar Power         | 120 - 200L  |  |  |  |  |  |  |  |  |





## THE GRASS ISN'T GREENER (BUT IT WILL BE SOON)

The Agrowplow Pasture Seeder makes pasture renovation simple. Custom spacings and rugged seed rollers ensure your small seeds are sown exactly where you need them every time. A rugged trailing design and robust direct drive mechanism ensure your paddocks can be maintained at peak productiveness and your livestock will always have something to keep them occupied.

With the Pasture Seeder, you've always got options to achieve optimal results. Hitch the machine directly to your tractor for hassle-free sowing, attach a trailing rubber tyre roller for the perfect seedbed finish, or run the Pasture Seeder behind your seed drill to maximise the effectiveness of your seeding operations.

## **EFFECTIVE SOWING**

The Pasture Seeder is available in either 38 or 60L capacities, ensuring you can get the job done fast and efficiently. Small seed rollers set at 150 or 175mm spacings are capable of handling a wide variety of small seed varieties with accurate placement to maximise your germination rates. With grasses, brassicas, clovers, and lucerne going through the rollers accurately and with ease, you'll be able to cater for even the pickiest eaters in your herd.

## **EASY MAINTENANCE**

The direct drive system that powers the Pasture Seeder operates from the right-hand tyre and is easily accessed via a forward-facing hatch. Easily adjust your sowing rate and keep your machine in perfect working order with a few simple turns.

| AT A GLANCE           |   |
|-----------------------|---|
| Sowing Rows           | 12, 14, 16, 20, 24, or 28                 |
| Toolbars              | 1   |
| Toolbar Spacings      | 150 or 174mm (custom spacings on request) |
| Frame                 | 100x100x9mm RHS steel                     |
| Under Frame Clearance | 460mm                                     |
| Hopper Capacity       | 38L/m or 60L/m                            |





## **425 Coil Tyne**

The robust design of the 425 Coil Tyne ensures the tyne has the strength to last season after season, and the inverted-T shape of the Baker Boot point opens a groove in the soil designed to minimise soil disturbance and ensure effective seed placement.

**Breakout:** 136kg (300lbs) **Suits:** AD083, AD130, AD230



#### **401 Double Disc Unit**

Agrowplow's 401 Double Disc Unit is comprised of twin 16" discs and features a self-cleaning design and slim profile that allows it to create a clean soil furrow that allows for closer row spacings, minimal soil disturbance, and high trash management.

**Breakout:** 181kg (400lbs) **Suits:** AD083, AD130, AD730



## **251 Spring Tyne**

The 215 Spring Tyne offers a robust platform for AD730 users to meet the needs of large-scale direct drilling. The Baker Boot point provides the high germination you need to achieve a great crop and the design offers high strength and reliability.

Breakout: 114kg (251lbs)

Suits: AD730





## **552 HD Spring Tyne**

The 552 HD Spring Tyne is ideal for the toughest conditions. Featuring tungsten hardfaced direct drill point, sturdy construction, and a breakout more than double that of the 251 Tyne, it will handle drilling longer in the toughest terrain.

Breakout: 250kg (550lbs)

Suits: AD730

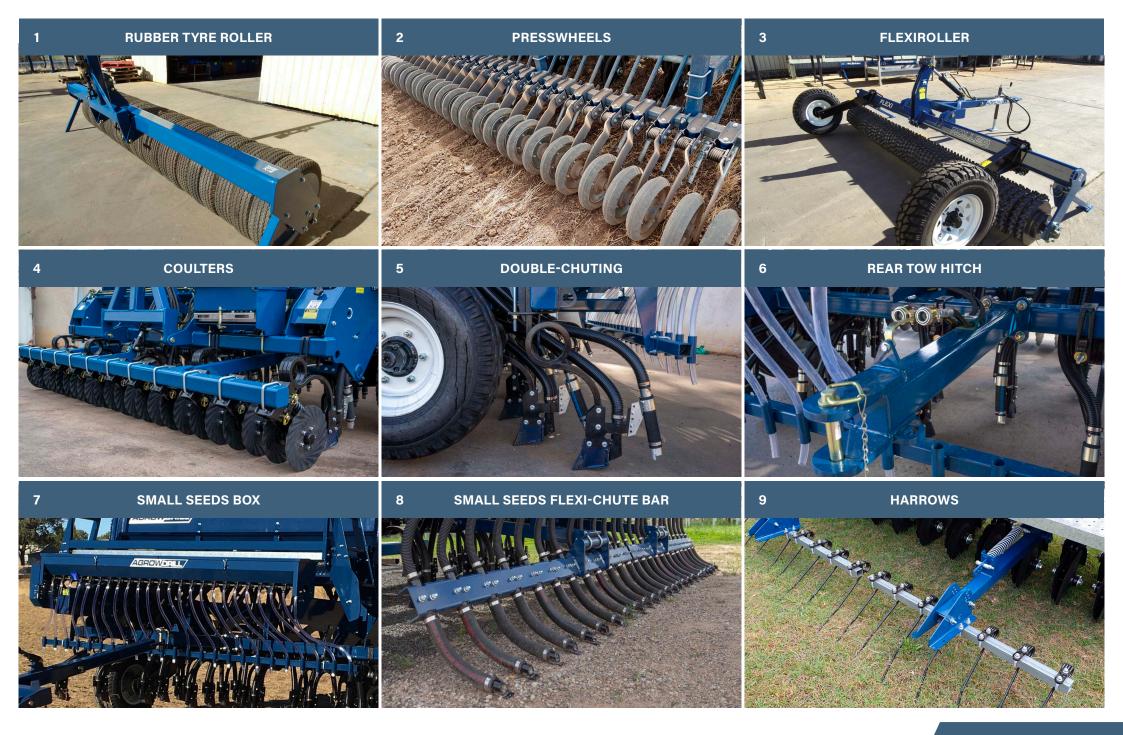

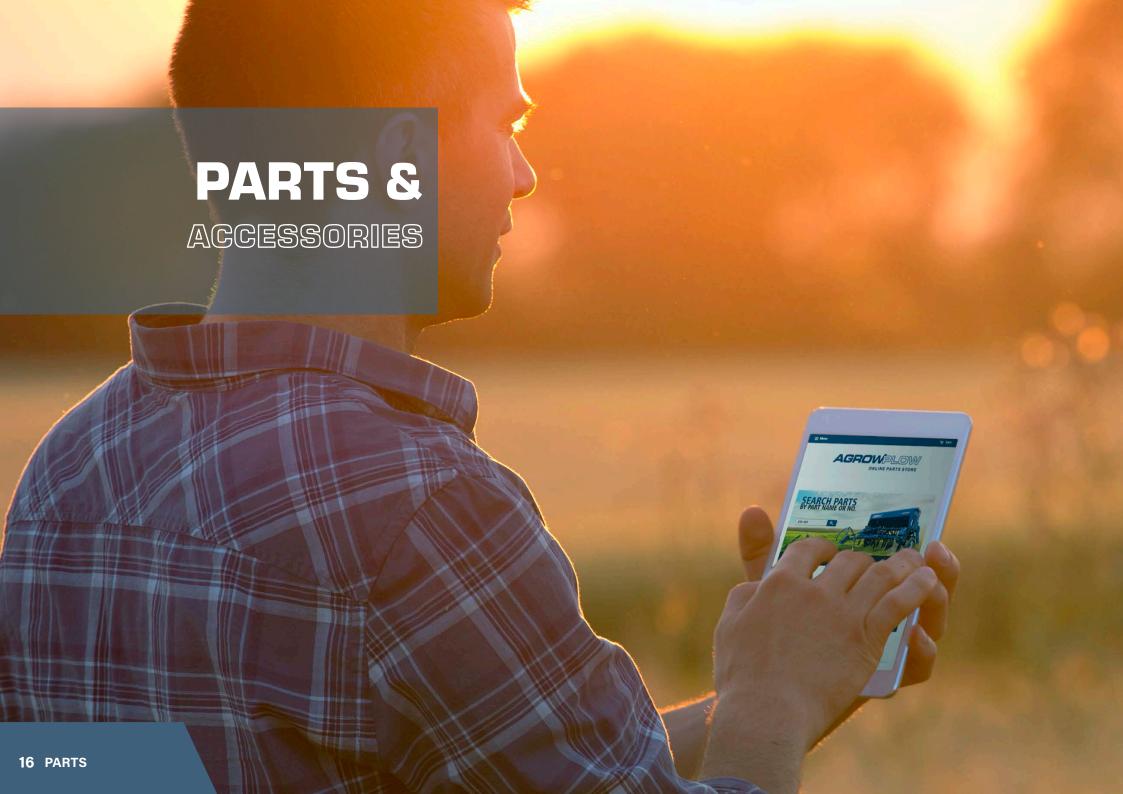



## THE STORE THAT'S READY WHEN YOU ARE

At Agrowplow we know how important it is that your machine is as well-supported today as it is ten years from now. That's why our online store is available day and night to make sure your seed drill is always ready to sow the next crop.

We offer spare parts and accessories for our entire Agrowdrill range, from the latest model machines to the earliest Agrowdrills\*.

Simply log in to **shop.agrowplow.com.au** to browse our entire range, with most orders packed and shipped within one working day. Plus, once you've created an account we'll keep you up to date with all the latest news and special offers on wear parts and accessories for your machine.

#### DON'T GET CAUGHT OUT

Know what needs replacing, but don't know what it's called? Eliminate doo-hickey-itis with our online store. You'll find up-to-date owners and parts manuals for a range of our machines so you know exactly what it is you need to order, right down to the part number and name.

Never get caught out again! Create your account today and ensure you've got ready access to the Agrowplow range of parts and accessories. We're ready when you are.





|       | PASTURE SEEDER                              |                       |  |   |      |      |  |  |  |  |  |
|-------|---|-----------------------|--|---|------|------|--|--|--|--|--|
|       | 12  | 14                    | 16   | 20  | 24   | 28   |  |  |  |  |  |
|       | 150mm or 175mm (custom spacings on request) |                       |  |   |      |      |  |  |  |  |  |
|       | 2.1m  | 2.4m                  | 2.8m   | 3.5m  | 4.2m | 4.9m |  |  |  |  |  |
|       | 2.8m  | 3.1m                  | 3.5m   | 4.2m  | 4.9m | 5.6m |  |  |  |  |  |
| Front | 38L or 60L                                  |                       |  |   |      |      |  |  |  |  |  |
| Rear  | -   |                       |  |   |      |      |  |  |  |  |  |
|       |   |                       | 235/7  | '5 R15  |      |      |  |  |  |  |  |
|       |   |                       | 1  | I   |      |      |  |  |  |  |  |
|       |   |                       | -  |   |      |      |  |  |  |  |  |
|       | Adjustable height drop-chutes               |                       |  |   |      |      |  |  |  |  |  |
|       | 460mm                                       |                       |  |   |      |      |  |  |  |  |  |
|       | Trailing                                    |                       |  |   |      |      |  |  |  |  |  |
|       | -   |                       |  |   |      |      |  |  |  |  |  |
|       |   |                       |  |   |      |      |  |  |  |  |  |
|       |   | 2.1m<br>2.8m<br>Front | 12 14 150mm or 2.1m 2.4m 2.8m 3.1m  Front Rear | 12 14 16 150mm or 175mm (custo 2.1m 2.4m 2.8m 2.8m 3.1m 3.5m  Front 38L of Rear  Adjustable height and the second | 12   | 12   |  |  |  |  |  |

|                          | AD                      | 083           |                            | AD.                  | D130 AD230   |  |                         |           |           |  | AD730      |   |           |       |       |
|--------------------------|-------------------------|---------------|----------------------------|----------------------|--|--|-------------------------|-----------|-----------|--|------------|---|-----------|-------|-------|
| 10                       | 11                      | 18            | 17                         | 16                   | 20   | 20   | 24                      | 16        | 24        | 28   | 18         | 22  | 20        | 24    | 28    |
| 175mm                    | 159mm                   | 150mm         | 159mm                      | 150mm                | 150mm  | 150mm  | 125mm                   | 225mm     | 150mm     | 125mm  | 225mm      | 225mm   | 175mm     | 175mm | 175mm |
| 1.75                     | 1.75m 2.7m              |               | 2.4m                       | 3.0m                 | 3m   | 3m   | 3.6m                    | 3.6m      | 3.5m      | 4.05m  | 4.05m      | 3.5m  | 4.2m      | 4.9m  |       |
| 21                       | 2m 2.95m                |               | 2.89m                      | 3.49m                | 3.25m  | 3.25m  | 3.7m                    | 3.7m      | 3.7m      | 4.87m  | 5.75m      | 4.35m   | 5.05m     | 5.75m |       |
| 24                       | 5L                      | 40            | 7L                         | 300L                 | 385L   | 605L   | 605L                    | 710L      | 710L      | 710L   | 880L       | 1080L   | 775L      | 920L  | 1080L |
|                          | -                       |               | -                          | 300L                 | 385L   | 605L   | 605L                    | 710L      | 710L      | 710L   | 880L       | 1080L   | 775L      | 920L  | 1080L |
|                          | 195                     | 5R14          |                            | 235/7                | 5 R15  | 11.5/80 - 15.3 implement tyres   |                         |           |           |  | 380/85 R24 |   |           |       |       |
|                          | :                       | 3             |                            | 3                    | 3  |  |                         | 4         |           |  |            |   | 4         |       |       |
|                          | 450                     | )mm           |                            | 440                  | mm   |  |                         | 442mm     |           |  | 550mm      |   |           |       |       |
| 425 Coil Tyne            | 401 Double<br>Disc Unit | 425 Coil Tyne | 401 Double<br>Disc Unit    | 425 Co<br>401 Double |  |  | 425 Coil Tyne 251 Sprin |           |           |  |            | 2 HD Spring Ty<br>251 Spring Tyn<br>1 Double Disc U | g Tyne    |       |       |
|                          |                         |               | 425 Tyne:<br>401 Disc:     |                      | 425 Tyne: 620mm  |  |                         |           |           | 552 HD Tyne: 720mm<br>251 Spring Tyne: 620mm<br>401 Disc: 620mm  |            |   |           |       |       |
| CAT2 three point linkage |                         |               | Trailing with CAT2 three p |                      | Trailing with hydraulic lift   |  |                         |           |           | Trailing with hydraulic lift   |            |   |           |       |       |
| 60-80hp 80-100hp         |                         | 70-90hp       | 80-100hp                   | 80-100hp             | 80-100hp   | 100-130hp  | 100-130hp               | 100-130hp | 120-150hp | 130-180hp  | 120-150hp  | 130-160hp   | 150-200hp |       |       |
| Harrows Re               |                         |               |                            |                      | roller ters (trailing) draulic lift kit ows w hitch ch hydraulics oller (trailing) eds box | Bean roller Coulters Double chuting Flexiroller (trailing) Flexiroller hydraulic lift kit Harrows Presswheels Rear tow hitch Rear tow hitch hydraulics Rubber tyre roller (trailing) Small seeds box |                         |           |           | Bean roller Coulters Double chuting Flexiroller (trailing) Flexiroller hydraulic lift kit Harrows Presswheels Rear tow hitch Rear tow hitch hydraulics Rubber tyre roller (trailing) Small seeds box |            |   |           |       |       |
| -                        |                         |               | -                          |                      | Small seeds flexi-chute bar  |  |                         |           |           | Small seeds flexi-chute bar  |            |   |           |       |       |



Prosperity through Soil Care.

Your authorised Agrowplow dealer:

Agrowplow Head Office 2 Castle Street Molong NSW 2866

www.agrowplow.com.au 1300 722 491 agrowplow@agrowplow.com





